

Aquatronix

ATI 851/ ATI 951 Twist Lock DynaProbe

Industrial pH and ORP Sensors

BESTOBELL
AQUATRONIX

SINCE / DEPUIS 1953

BEP-Bestobell

www.bestobell.com

ATI 851 / ATI 951 Twist Lock DynaProbe Industrial pH and ORP Sensors

The ATI 851 is a rugged, sealed industrial pH or ORP sensor assembly designed for in-line or submersion applications in most industrial measurements, including waste water. They have proven ability to outperform conventional sensors in the toughest process applications. The **patented solid state reference cell** features the unique **IonTrap™** design for extended service life in the most severe applications. The body is moulded from chemically resistant Ryton (PPS) and the reference junction is either porous Teflon or wood.

Built-in temperature compensators are available. Optional sensor guard locks onto the front of the sensor and protects the sensor tip from impact. Sensor also available in ORP (Redox) version.

Specification

pH Range: 0-14 pH

Redox Range: ± 5000 mV

Temp Range: 0 -120° C


Max Pressure/Temp: 50 psig at 120° C

Reference: Ag-AgCl

Wetted Materials: Ryton, Teflon or wood, Glass and

Viton O-rings

Standard cable length: 7 Feet

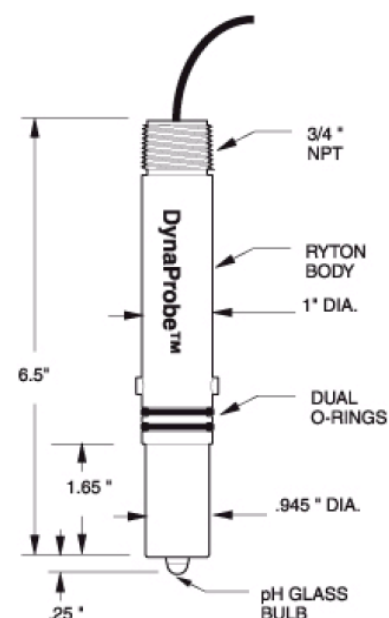

Model ATI 851



Options.....

pH DynaProbe™ with Rugged Dome pH Bulb.

Choice of either Teflon or Wood Coaxial Liquid Junction

Designed to withstand the toughest industrial applications for best overall performance.

pH DynaProbe™ with Flat pH Bulb.

Choice of Teflon Coaxial Liquid Junction only.

Designed for obstructionless contact with the sample stream for self cleaning service.

ORP DynaProbe™ with Platinum Band.

Choice of either Teflon or Wood Coaxial Liquid Junction

Designed for measuring the Oxidation- Reduction Potential of the sample.

Please use this information to build your part number. If you need any assistance please call us on 1-800-668-3979

Part No.	1	2	3	4	-	5	6	7	8	9
ST851/ST951	—	—	—	—	—	—	—	—	—	—

1 — Liquid Junction

- [W] Recessed Coaxial Wood
- [T] Coaxial Teflon
- [R] Recessed Coaxial Teflon

2-3—Measurement Electrode:

- [33] pH, HT-3 Rugged Dome Bulb
- [43] pH, HT-4 High pH bulb (for pH13 & above)
- [17] pH, GP Flat Bulb (only with style "T" Teflon junction, 100C Max.)
- [PB] Redox, Platinum Band

4 — Temperature Compensator:

- [0] No T.C.
- [1] 3K Ohms
- [9] 301 Ohms
- [D] Pt 100 Ohms
- [H] Pt 1000 Ohms

5 — Cable Type:

- [A] Low Noise Coax (<80C service)- for more than 7 ft.
- [E] Jacketed Coax w/TC leads (<80C service)- for more than 7 ft.
- [T] Teflon Coax (>80C service) for more than 7 ft.
- [U] Jacketed Teflon Coax w/TC leads (>80C service) for more than 7 ft.

6-7 — Cable Length:

- [07] 7 ft. is standard length
- [xx] Specify length (in feet) above 7 ft. standard length

8-9 — Required Sensor Connectors:

- [FB] BNC for pH & ferrules on all other leads (use with Terminal block)
- [BC] BNC for pH and Redox only (no T.C)
- [FF] All Ferrule connectors (for use with Terminal block or Terminal Strip)
- [B1] BNC for pH, Stripped & tinned leads for T/C. (use with Terminal Block)

Accessories:

ATI-0120T CPVC twist-lock submersible guard


ATI-0117 Epoxy twist-lock 1" MNPT adaptor

For extension cables contact Bestobell-Aquatronix

Note: ATI 951, same as ATI 851 but with conductive body material for solution grounding.

SUBMERSION INSTALLATION:

The Model ST851 is readily converted into a submersion sensor by the installation of a twist-lock bulb guard.

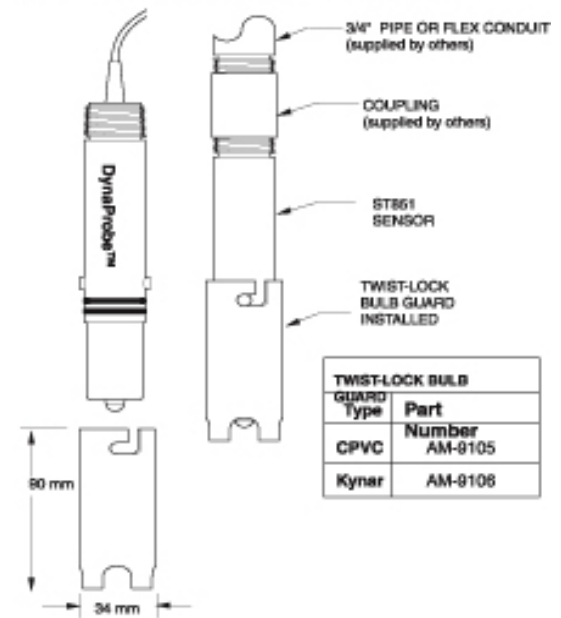

BESTOBELL
AQUATRONIX
SINCE/DEPUIS 1953

Head Office
2880 Argenta Road, Unit 3
Mississauga, ON L5N 7X8
salesdesk@bestobell.com
1-800-668-3979
www.bestobell.com

Since 1953, Quality Products to Sense, Measure & Control
Depuis 1953, Produits De Qualités Pour Détecter, Mesurer & Contrôler

Montréal Office
970 Montée de Liesse, #204
St.Laurent, QC H4T 1W7
ventes@bestobell.com
1-877-331-1225

Atlantic Office
166 North Side Road
Riverport, NS B0J 2W0
dmossman@bestobell.com
902-529-0355